
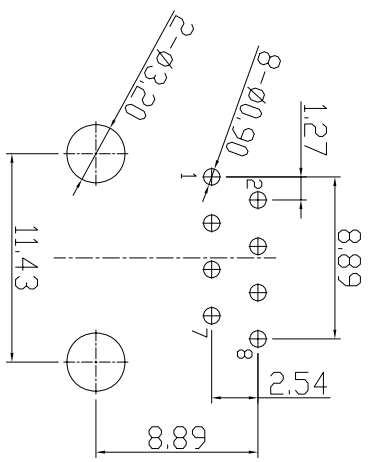


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 562208系列全塑1x1	MJ562208-XX11-RN1


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	KELLY	2008.07.13
A02	—	整理圖面	XSY	2015.03.10
A03	—	新增产品颜色灰色	FHF	2017.01.05

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO:
DECIMALS: X :±0.5	SIZE: A3	PAGE:1 OF 1	REV:A03
ANGLES: XX :±0.3	APPROVED BY	CHECKED BY	PREPARED BY
XXX :±0.2	DICK	XSY	XSY

SPECIFICATION				
1.	VOLTAGE RATING:	125 VAC RMS.		
2.	CURRENT RATING:	1.5 AMP		
3.	CONTACT RESISTANCE:	40 mΩ MAX		
4.	INSULATION RESISTANCE:	500MΩ MIN.		
5.	WITHSTAND VOLTAGE:	AC1000V RMS 60S.		
6.	OPERATING TEMPERATURE:	-40°C~+80°C		

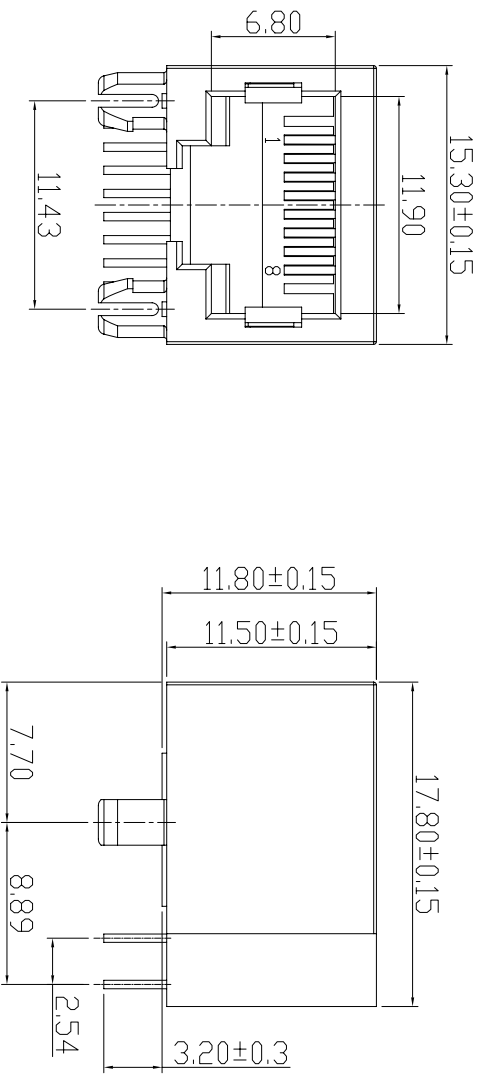

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm

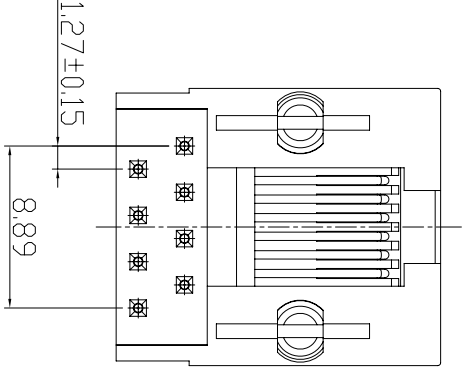

MJ562208-XX11-RN1

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

TABLE 1

X	PART COLOR
B	BLACK
Y	YELLOW
L	Blue 306C
G	Grey

東莞市合陵電子有限公司
DongGuan Heling Electronic Co.,LTD

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	TERMINAL	8	PHOSPHOR BRONZE Ø0.46mm	AU PLATING	
b	INSERT	1	PBT UL94V-0	SEE TABLE 1	
d	HOUSING	1	PBT UL94V-0	SEE TABE 1	

SCALE:1/1	UNIT: mm	DWG.NO:
SIZE: A3	PAGE:1 OF 1	REV:A03
APPROVED BY	CHECKED BY	PREPARED BY
DICK	XSY	XSY

CUSTOMER COPY