



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 全塑1x1	MJ562204-XX11-RN1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A02	—	增加颜色编码	XSY	2016.05.18
A03	—	增加颜色编码	FHF	2016.12.27
A04	—	增加颜色编码	XSY	2017.12.28


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A02	—	增加颜色编码	XSY	2016.05.18
A03	—	增加颜色编码	FHF	2016.12.27
A04	—	增加颜色编码	XSY	2017.12.28

SPECIFICATION

- VOLTAGE RATING: 125 VAC RMS.
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 40 mΩ MAX
- INSULATION RESISTANCE: 500MΩ MIN.
- WITHSTAND VOLTAGE: AC1000V RMS 60S.
- OPERATING TEMPERATURE: -40°C~+80°C

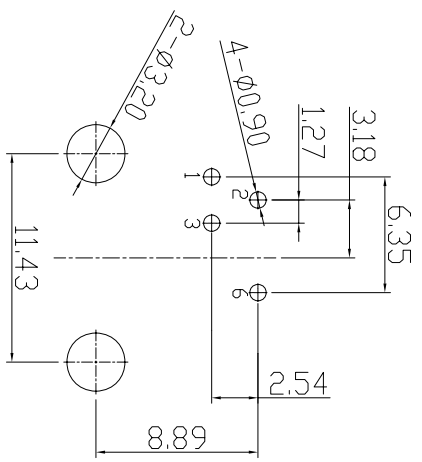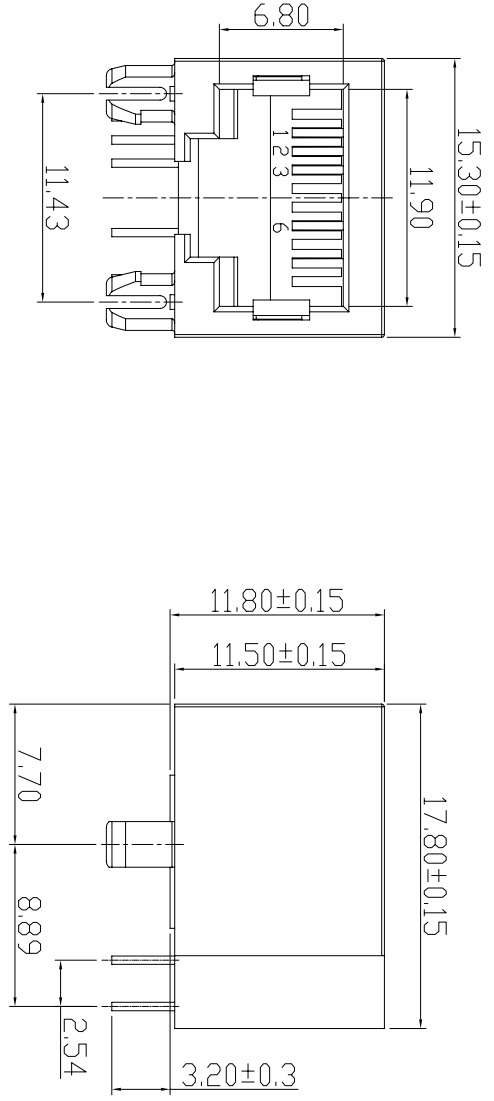

Recommend PCB Layout
(Jack Top View)
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm

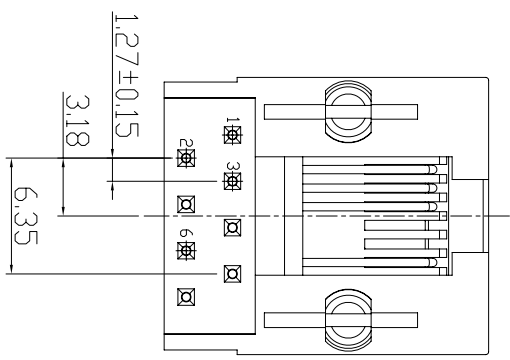

MJ562204-XX11-RN1

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

TABLE 1

X	HOUSING COLOR
B	BLACK
Y	YELLOW
L	BLUE (306C)
G	GRAY

c	TERMINAL	4	PHOSPHOR BRONZE	∅0.46mm	AU PLATING
b	INSERT	1	PBT UL94V-0		SEE TABLE 1
d	HOUSING	1	PBT UL94V-0		SEE TABE 1
NO.	PART NAME	Q'TY	MATERIAL		Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES	DECIMALS:	ANGLES:
	X : ±0.5	X : ±2°
	XX : ±0.3	XX : ±1°
	XXX : ±0.2	

东莞市合陵电子有限公司
 Dongguan Heling Electronic Co.,LTD
 Connector

SCALE: 1/1 UNIT: mm DWG.NO:
 SIZE: A3 PAGE: 1 OF 1 REV: A04
 APPROVED BY: _____ CHECKED BY: _____ PREPARED BY: _____
 DICK: XSY
CUSTOMER COPY